

Filtration Systems (FS2) • How to Order

Filtration System (FS2) includes:

- Pump with Internal Bypass Valve
- Gear Reducer
- Motor mounted on a 2-Wheel Cart
- Inlet Bag Filter Housing
- Differential Pressure Gauges
- Outlet Coalescing/Cartridge Filter Housing
- 2 Grounding Clamps
- 50 feet of power cord ☒
- Bypass Valve allows pump to go into recirculation when discharge nozzle is closed.
- Gear reducer selected determines the pump speed and flow rate.
- Inlet & Outlet Connections are fitted with 1.5" Male Camlock fittings for quick-connection to hoses.
- EP units are supplied without plug; Non-EP units include 50 ft. of power cord with 3-prong 115V plug.

Single-Phase • AC Motor

Non-Explosion Proof

| Pump Size | Flow (GPM) | Bypass Pressure (PSI) | HP | Volts/Amps | Model Code | Gear Ratio | Pump Speed (RPM) |
|-----------|------------|-----------------------|-----|----------------------|----------------------|------------|------------------|
| 1.5" | 55 | 20 | 1.5 | 115V / 12A | 15AB25AC1A015N-4DB01 | 2.5 : 1 | 690 |
| | 30 | 20 | | 230V / 6A | 15AB40AC1A015N-4DB01 | 4 : 1 | 420 |
| | 30 | 50 | | 15AD40AC1A015N-4DB01 | 4 : 1 | 420 | |

Single-Phase • AC Motor


Explosion Proof

| Pump Size | Flow (GPM) | Bypass Pressure (PSI) | HP | Volts/Amps | Model Code | Gear Ratio | Pump Speed (RPM) |
|-----------|------------|-----------------------|-----|----------------------|----------------------|------------|------------------|
| 1.5" | 55 | 20 | 1.5 | 115V / 12A | 15AB25AC1A015X-4DB01 | 2.5 : 1 | 690 |
| | 30 | 20 | | 230V / 6A | 15AB40AC1A015X-4DB01 | 4 : 1 | 420 |
| | 30 | 50 | | 15AD40AC1A015X-4DB01 | 4 : 1 | 420 | |

HOSE & NOZZLE Kit Includes:

Kit Order #: 95-15050

- (1) 10 ft. Outlet Hose
- (1) 10 ft. Inlet Hose
- (1) Manual Discharge Nozzle w/ 1.5" Male Camlock Fitting
- (1) 3 ft. Suction Drop Pipe w/ 1.5" Male Camlock Fitting ☒

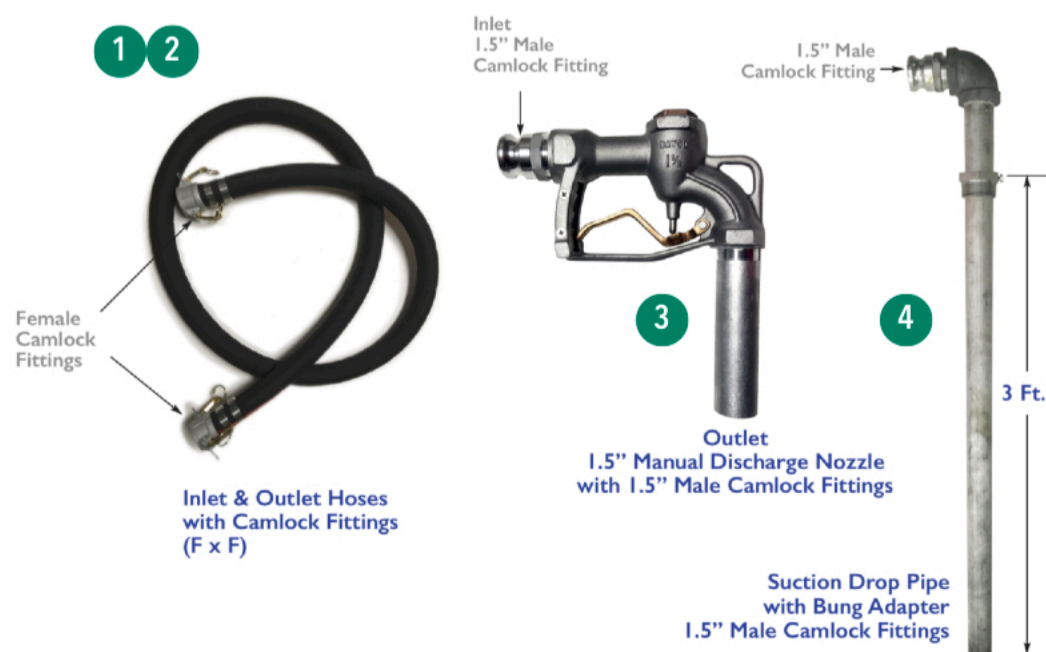

Individual Item Prices when sold separately:

- 1 Inlet (suction) Hose with Female Camlock fittings: (available in 10, 20 and 30 ft. lengths)
- 2 Outlet (discharge) Hose with Female Camlock fittings: (available in 10, 20 and 30 ft. lengths)
- 3 Manual discharge nozzle: (with 1.5" Male Camlock fitting) Suitable for filling totes and containers.
- 4 Suction drop pipe with Bung Adapter: (1.5" Male Camlock fitting) Connects to hose end for emptying container